



GPX10-15 GENERAL PURPOSE


This product offers a cost effective solution for the user who requires a diamond blade that can cope with the cutting of the most widely used non-abrasive building materials.

KEY FEATURES

- 15mm Segment Height
- Angled gullets for quick stock removal
- Cooling holes to aid heat dissipation
- Castellated segments for fast cutting



Mexco Diamond Blade product packaging

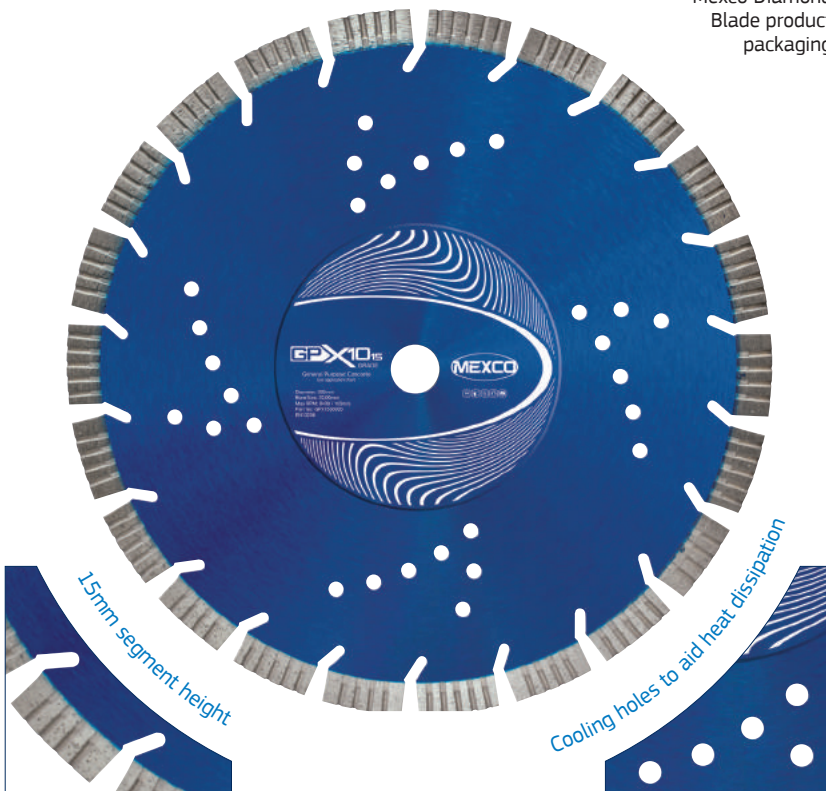

PRODUCT OVERVIEW:

Grade: X10
Segment Height: 15mm
Segment Attachment: Sintered
Dry/Wet: Wet or Dry Use
Recommended for: Angle Grinder and Disc Cutter
Segment Type: Segmented
Gullet Type: Angled
Undercutting Protection: No



EXCELLENT VALUE

The X10 range of products has been specifically designed to offer the user excellent performance in a wide spectrum of cutting and drilling applications whilst providing the benefit of a low purchase cost.



PRODUCT DATA SHEET

DIAMETERS AVAILABLE:

Code	Diameter		Segment Width (mm)	Bore Size / s (mm)
	(mm)	(in)		
GPX1511522	115	4.5	3.2	22.23
GPX1523022	230	9	3.2	22.23
GPX1530020	300	12	3.2	20
GPX1535020	350	14	3.4	20
GPX1535025	350	14	3.4	25.40

SUITABLE FOR USE ON:




APPLICATION:

- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Pavements
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone



Hard Slate



Flint Aggregate Concrete




Reinforced Concrete



Concrete Kerbs



Concrete Slabs



Reinforced Lintels

- **RECOMMENDED** to cut these materials
- **Will cut these materials** with the possibility of reduced lifetime / glazing

CONFORMS TO EN13236